

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

This Page Blank (uspto)



(11) Publication number : **0 689 318 A2**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number : **95304356.9**

(51) Int. Cl.⁶ : **H04L 12/56**

(22) Date of filing : **21.06.95**

(30) Priority : **21.06.94 JP 138830/94**

(43) Date of publication of application :
27.12.95 Bulletin 95/52

(84) Designated Contracting States :
DE FR GB SE

(71) Applicant : **NEC CORPORATION**
7-1, Shiba 5-chome
Minato-ku
Tokyo (JP)


(72) Inventor : **Murase, Tutomu, c/o NEC Corporation**
7-1 Shiba 5-chome,
Minato-ku
Tokyo (JP)

(74) Representative : **Garratt, Peter Douglas et al**
Mathys & Squire
100 Grays Inn Road
London WC1X 8AL (GB)

(54) **Priority control method of virtual circuit and a device thereof**

(57) The present invention monitors the state of utilization of a buffer and a cell that has been disposed. Based on this monitoring information, it selects a virtual circuit to be given lower priority order to input it into the buffer in lower priority order.

Fig.2

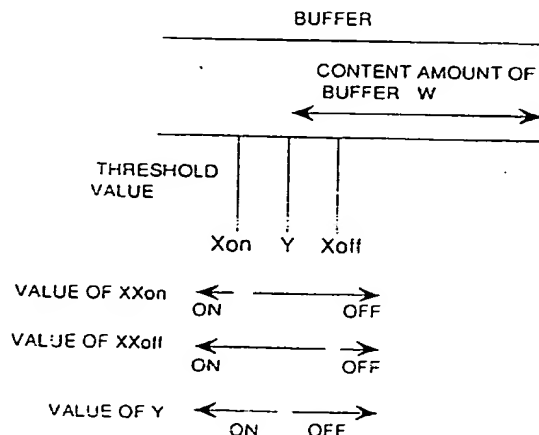

EP 0 689 318 A2

BACKGROUND OF THE INVENTION

This invention relates to an art for controlling priority of virtual circuits in a communication network of a packet switching system.

With the packet switching system, a statistical load variation is likely to cause a buffer overflow at multi-switching owing to an instantaneous overload.

An ATM system also causes the similar overflow resulted from using the packet called as a fixed length cell.

As the ATM system uses the fixed length cell, the message longer than the cell length is transmitted in the form of a plurality of divided cells. The ATM system may use a protocol which allows no re-transmission control at every cell. Accordingly, if a certain cell is disposed, the message containing the disposed cell is rejected. So it requires to re-transmit not only disposed cell, but also all the cells. Especially when the buffer is congested, all the call cells using the buffer may be disposed due to overflow.

Conventional methods have been introduced to control the congestion, for example, a method for randomly selecting n pieces of cells to be disposed from N pieces of arriving cells, or a method for disposing the cell in accordance with preset priority order (in "Congestion control method in ATM network" B-481, Electronic Communication Society, Spring conference, 1991).

Quality as an interest of users is directly influenced by a message disposing ratio, not a cell disposing ratio. The message disposing ratio, similar to the cell disposing ratio, is defined as the number of received messages (MR) to the number of sent message (MS), i.e., MR/MS .

The aforementioned congestion control method may intensify the possibility to disperse disposed cells into a plurality of messages. For example, it is assumed that one message is divided into 10 cells and there are 10 virtual circuits for sending the message. Supposing that the cell disposing ratio is 0.1, i.e., 10 out of 100 cells are inevitably disposed, if each of 10 the disposed cells is respectively dispersed in 10 messages, the message disposing ratio would be 1.

If disposed cells are dispersed in many messages, all the messages containing the disposed cells are retransmitted, thus substantially decreasing throughput of the networking.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide an art for concentrating cells to be disposed to a specific call selected depending on each communication status thereof and prevent a message disposing ratio from being deteriorated irrespective of the cell disposing ratio.

An object of the present invention is achieved by a priority control method of virtual circuit (VC) that controls priority order of a plurality of virtual circuits that are multiplied in a buffer, comprising steps of: monitoring the state of utilization of the buffer; and selecting an arbitrary virtual circuit from among the plurality of virtual circuits and giving the selected virtual circuit lower priority order, when the buffer is in congestion.

Moreover, the object of the present invention is achieved by a priority order control device of virtual circuit that controls priority order of a plurality of virtual circuits, comprising: a buffer for receiving cells via the plurality of virtual circuits; means for monitoring the state of utilization of the buffer; control means for selecting an arbitrary virtual circuit from among the plurality of virtual circuits when the buffer is in congestion, and giving the selected virtual circuit lower priority order; and disposal means for disposing a cell having been received when the buffer is in congestion and the cell corresponds to said selected virtual circuit.

The present invention is so designed to dispose the input cell partially when the buffer is congested, and to further dispose the succeeding cells (with the same virtual circuit identifier) to eliminate the congestion with the aid of the effect equivalent to that for temporarily decreasing the load. As a result, the other undisposed VC cells can be protected.

This invention serves to eliminate the overload condition by decreasing the cell disposing ratio of cells on the VC other than that on the specific VC so as to decrease the message disposing ratio. In this invention, a certain VC is selected at overload or the state of congestion of the buffer, so that cells thereon are given lower priority order. For example, even when the buffer has vacancy, the cells on the selected VC are rejected by the buffer and disposed, which decreases the inputting load exerted to the buffer, thus eliminating overload or congestion.

The cells of the other VCs are processed in the same manner as in the case of being input to the buffer under normal load, thus decreasing the disposing ratio.

Concentrating cells on the specific VC to be disposed increases the message disposing ratio of the specific VC. However the message disposing ratios of the other VCs are decreased. As a result, the present invention decreases the message disposing ratio of the system as a whole.

BRIEF DESCRIPTION OF THE DRAWINGS

This and other objects, features and advantages of the present invention will become more apparent upon a reading of the following detailed description and drawings, in which:

Fig. 1 is a block diagram of a first embodiment;

Fig. 2 is an explanatory view of a buffer 301;
 Fig. 3 is an explanatory view of an FT303;
 Fig. 4 is an explanatory view of a mechanism of the first embodiment;
 Fig. 5 is an explanatory view of a mechanism of a prior art;
 Fig. 6 is a block diagram of a second embodiment; and
 Fig. 7 is an explanatory view of a mechanism of a third embodiment.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiments of the present invention are described referring to drawings.

Fig. 1 is a block diagram of the present invention.

In Fig. 1, a reference numeral 301 is a buffer multiplied with a plurality of virtual circuits (hereinafter referred to as VC).

A reference numeral 302 is a buffer monitor (hereinafter referred to as BMon 302) for monitoring the service condition of the buffer 301 to detect congestion and eliminate the state of congestion of the buffer. It monitors disposed cells due to overflow of the buffer 301.

A reference numeral 303 is a forwarding table (hereinafter referred to as FT 303) used for selecting a certain VC to be given lower priority order at the state of congestion, and return the priority order of the VC to its original priority order in the state that congestion is eliminated.

A reference numeral 304 is a priority control (hereinafter referred to as PC 304) provided in an input part of the buffer 301. The cells of each VC, that have own virtual circuit identifier (hereinafter referred to as VCI), arrive at the PC 304. Before inputting those cells to the buffer 301, the PC 304 transfers the VCI of the cell to the FT 303 and processes the cell in compliance with the instruction of the FT 303.

Next, detection of congestion and the state that congestion is eliminated in the buffer 301 and processing method of the cell are described.

As Fig. 2 shows, the BMon 302 monitors the content amount W of the buffer 301 in relation with a threshold value X_{on} , threshold value X_{off} , and threshold value Y .

When the buffer 301 contains cells of W , the signal XX_{on} is set to ON if $X_{on} \leq W$, and the signal XX_{on} is set to OFF if $W < X_{on}$. The buffer 301 sets the signal XX_{off} to ON if $X_{off} \leq W$, and sets the signal XX_{off} to OFF if $W < X_{off}$. It sets the signal YY to ON if $Y \leq W$, and to OFF if $W < Y$.

When the signal XX_{on} has changed from OFF to ON, the BMon 302 determines this state as being congested, and outputs a congestion detection signal. When the signal XX_{off} has changed from ON to OFF, the BMon 302 determines that the state of congestion

has been eliminated, and outputs a congestion eliminated detection signal. The BMon 302 further transmits ON/OFF information of the signal YY to the PC 304.

Responding to the congestion detection signal from the BMon 302, FT 303 selects some cells (hereinafter referred to as "specified cells") from those arriving at the PC 304 in the state of congestion based on the VCI from the PC 304. As Fig. 3 shows, the FT 303 writes "none" in an admission area of the VCI of the forwarding table (hereinafter referred to as FT) corresponding to the specified cells. If the cells sent to the buffer 301 are disposed due to buffer overflow, the FT 303 sets all the disposed cells as specified cells based on the disposed cell information sent from the BMon 302, and writes "none" in the admission area of the VCI corresponding to the specified cells. While if receiving a congestion eliminated detection signal from the BMon 302, the FT 303 writes "OK" in the admission area of all the VCI. In case the VC is newly set, the FT 303 writes a new VCI number corresponding to the set VC through the signal line 306 to the VCI area, and writes "OK" in the admission area of the VCI number. Upon finishing the VC, the FT 303 erases the VCI number and contents of the admission area corresponding to the VC.

When the cell has arrived during the signal YY is ON, the PC 304 searches over the FT admission area of the FT 303. If the admission area corresponding to the VCI of the received cell is written as "none", the cell is disposed without being output to the buffer 301. While if the admission area corresponding to the VCI of the received cell is written as OK, the cell is output to the buffer 301. If the signal YY is OFF, all the received cells are output to the buffer 301.

More specific mechanism is described referring to Fig. 4.

Here, it is assumed that the buffer 301 is multiplied with 9 VCs with a capacity of 6 cells. Among those cells arrived during detecting congestion, only a cell with the smallest VCI is selected to be a specified cell. The VC corresponding to the specified cell is processed in lower priority order. In case of arriving a plurality of cells including the one selected as the specified cell, only a cell with the smallest VCI is selected to be a specified cell except the one which has been already selected as the specified cell. The VC corresponding to the specified cell is processed in lower priority order.

It is assumed that the threshold value X_{on} is an address number 5, the threshold value X_{off} is an address number 3, and the threshold value Y is an address number 4.

Each of 9 VCs transfers one message which is divided into a plurality of cells for transmission thereon. In Fig. 4, an arrival conditions of cells 601 shows that the cells of $VCI=1, 2, 5, 8, 9$ arrive in the buffer simultaneously at a time ($t=1$) from an input line, for

example. A buffer conditions 602 shows that a space for only one cell is left because 5 cells, 1, 2, 5, 8, 9 have already occupied to be serviced sequentially from forward through FIFO in the buffer 301 with the capacity of 6 cells. The cell outside the buffer, the cell 603, is the disposed cell.

When cells of VCI=1, 2, 5, 8, 9 arrive in the buffer 301 simultaneously at a time (t=1) from an input line, the buffer 301 is occupied up to the address number 5. Then the signals XXon and YY are turned to be ON, and the BMon 302 determines that the buffer is in congestion and outputs a congestion detection signal.

When cells of VCI=3, 4, 5, 6 arrive in the buffer 301 simultaneously at a time (t=2) from an input line, the FT 303 writes "none" in the admission area of VCI=3 to be given lower priority order responding to the congestion detection signal. The PC 304 recognizes the received cell of VCI=3 as a specified cell and disposes it. The rest of the cells, VCI=4, 5, 6 are output to the buffer 301, and the cell of VCI=6 is disposed because of overflow. Then the BMon 302 outputs the cell information on the disposed VCI=6 to the FT 303. The FT 303 writes "none" in the admission area of the VCI=6 to be given lower priority order.

When cells of VCI=3, 7 arrive in the buffer 301 simultaneously at a time (t=3) from an input line, the PC 304 checks the cells of VCI=3, 7 since the signal YY is set to ON. The admission area of VCI=3 of the FT is written as "none", then the cell of VCI=3 is disposed. The buffer 301 is kept congested yet, the FT 303 processes the cell of VCI=7 in lower priority order and writes "none" in the admission area of the cell of VCI=7. The PC 304 disposes the cell of VCI=7.

When cells of VCI=3, 6, 7 arrive in the buffer simultaneously at a time (t=4) from an input line, the PC 304 checks the cells of VCI=3, 6, 7 since the signal YY is kept ON. The admission area of the cells of VCI=3, 6, 7 of the FT is written as "none", so the cells of VCI=3, 6, 7 are disposed.

When a cell of VCI=6 arrives in the buffer at a time (t=5) from an input line, the PC 304 checks the cell of VCI=6 since the signal YY is kept ON. The admission area of the VCI=6 is written as "none", so the cell of VCI=6 is disposed. After disposing the cell of VCI=6, the buffer 301 is occupied up to the address number 3, thus changing the signal YY to OFF.

When the cells of VCI=3, 4 arrive in the buffer at a time (t=6) simultaneously from an input line, the PC304 outputs them to the buffer 301 without checking since the signal YY is kept OFF. Inputting cells of VC=3, 4 serves to set the signal YY to ON, again.

Since no cell arrives at a time (t=7, 8), the buffer 301 is occupied up to the address number 2. As the signal XXoff changes to be OFF, the BMon 302 determines that the state of congestion has been eliminated, and outputs a congestion eliminated detection signal. At the same time, the signal YY is set to OFF.

The FT 303 receives the congestion eliminated detection signal and writes "OK" in the admission area of cells of VCI=3, 6, 7 to return VCI=3, 6, 7 to their original priority order.

When cells of VCI=1, 2, 6, 8, 9 arrive in the buffer at a time (t=9) simultaneously from an input line, the PC 304 outputs them to the buffer 301 without checking since the signal YY is kept OFF.

An prior art is operated in the same manner as that of this invention for the purpose of comparison.

Fig. 5 is an explanatory view showing a function of the prior art.

The prior art causes buffer overflow at each time t of 2, 3, 4, 6, and 9.

In the prior art, the cell to be disposed at the buffer overflow is randomly selected at every overflow.

As a result, 8 cells of VC=5, 6, 7, 6, 7, 4, 8, 9 are disposed. The message disposing ratio at this time is 6/9, that is, 6 messages (VCI=4, 5, 6, 7, 8, 9) within 9 messages are disposed.

In the present invention, 8 cells of VCI=3, 6, 3, 7, 3, 6, 7 are disposed. The message disposing ratio at this time is 3/9, that is, 3 messages (VC=3, 6, 7) within 9 messages are disposed.

The present invention substantially improves the message disposing ratio, and provides a user greatly improved communication quality.

The first embodiment uses the method for selecting the specified cell where only one cell with the smallest VCI is selected from those received during detecting congestion. However the cell of VCI with a greater value may be applicable. A plurality of cells may also be selected. Alternatively the method for selecting the cell randomly, or selecting the cell according to the priority order of the VCI may be available.

The number of the selected cell may be random, or the number multiplied with a constant value. All the cells to be disposed may be selected.

Next, a second embodiment is described. Functions of the second embodiment are the same as those in the first embodiment. However, the following functions are added thereto. Referring to Fig. 6, a timer 307 is connected to the FT 303. The timer 307 clocks at every VC beginning from writing of "none" in the admission area. After a lapse of a time predetermined by a system at every VC, "OK" is written into the admission area of the VC number in the same manner as the VC setting.

This invention, dynamically concentrating the cell to be disposed to a specific VC with priority control, also dynamically determines the VC to be specified depending on actual communication conditions, which prevents rise of load and fall of throughput due to re-transmission, resulting in efficient communication.

A third embodiment is resulted from simplifying the first embodiment.

The FT 303 has no function for selecting a spe-

cified cell. Based on the VCI of the disposed cell sent from the buffer monitor 302, "none" is simply written in the admission area corresponding to the disposed cell in the same way as the first embodiment. When congestion is eliminated, "OK" is written in the admission area in similar way to the first embodiment. Functions of BMon 302 and PC 304 are the same as those of the first embodiment.

Operation of the third embodiment is described referring to Fig. 7.

It is assumed to use a buffer multiplied with 9 VCs with its capacity of 4 cells. Each of 9VCs transfers one message divided into a plurality of cells thereon.

In Fig. 7, an arrival conditions of the cell 701 shows that 3 cells of VCI=1, 2, 9 arrive in the buffer at a time ($t=1$) simultaneously from an input line. A buffer conditions 602 shows that the buffer 301 is occupied with 3- cells of 1, 2, 9, to be serviced sequentially from forward through FIFO, and the space for only one cell is left in the buffer 301 since the capacity of the buffer 720 is for 4 cells. The cell outside the buffer, the cell 730, is a disposed cell.

Referring to Fig. 7, a prior art may cause buffer overflow at each time ($t=3, 4, 6, 7$) as shown in the state of buffer 702. The cell disposed at the buffer overflow may be randomly selected at every overflow. The state of buffer 702 shows the content of the buffer and disposing condition of the cell in case disposed cells are randomly selected.

As the state of buffer 702 shows, the message disposing ratio of 5 disposed messages in 9 messages is defined as 5/9, since cells of VCI=7, 8, 9, 6, 1 are disposed.

A state of buffer 703 of the present invention is described. In the state of buffer 703, a cell of VCI=6 is disposed at a time ($t=2$) due to overflow. Additionally a cell of VCI=8 is disposed at a time ($t=3$) due to overflow. At a time ($t=6$), the cells of VC=6, 8 as those in the message which have been already disposed are also disposed in spite of vacancy of the buffer. At a time ($t=7$), undisposed cells of VCI=1, 2 may be output to the buffer. As a result, although 8 cells are disposed as shown in the state of buffer 703 of Fig. 7, they are only 2 kinds, the cells of VCI=6 and 8. So, the message disposal ratio results in 2/9.

Thus, the present invention greatly improves the message disposing ratio and provides a user a greatly improved communication quality.

Claims

1 A priority control method of virtual circuit that controls priority order of a plurality of virtual circuits that are multiplied in a buffer, comprising steps of:

monitoring the state of utilization of said buffer; and
selecting an arbitrary virtual circuit from

among said plurality of virtual circuits and giving the selected virtual circuit lower priority order, when said buffer is in congestion.

2 The priority control method of virtual circuit of claim 1, further comprising a step of returning the priority order of the virtual circuit given lower priority order to its original priority order when the state of congestion of said buffer has been eliminated.

3 The priority control method of virtual circuit of claim 1, further comprising a step of returning the priority order of an arbitrary virtual circuit among virtual circuits given lower priority order after a lapse of a predetermined time, irrespective of the state of utilization of said buffer.

4 The priority control method of virtual circuit of claim 1, wherein said step of giving a virtual circuit lower priority order comprising steps of:

selecting an arbitrary cell from among cells received via said virtual circuits when said buffer is in congestion;

selecting a virtual circuit corresponding to the selected cell; and

disposing said received cells without inputting them into said buffer if said cells having been received when said buffer is in congestion are those corresponding to said selected virtual circuits.

5 The priority control method of virtual circuit of claim 4, wherein said step of selecting said arbitrary cell comprises a step of selecting a predetermined number of cells in order of circuit number of corresponding virtual circuit from small to large from among cells having been received via said virtual circuits when said buffer is in congestion.

6 The priority control method of virtual circuit of claim 4, wherein said step of selecting said arbitrary cell comprises a step of selecting a predetermined number of cells in order of circuit number of corresponding virtual circuit from large to small from among cells having been received via said virtual circuits when said buffer is in congestion.

7 The priority control method of virtual circuit of claim 4, wherein said step of selecting said arbitrary cell comprises a step of selecting a cell corresponding virtual circuit of which priority order is low from among cells having been received via said virtual circuits when said buffer is in congestion, wherein the priority order of said virtual circuits is determined in advance.

8 The priority control method of virtual circuit of claim 1, further comprising steps of:

detecting a cell having been disposed due to overflow of said buffer from among cells having been received via said virtual circuits; and

giving a virtual circuit corresponding to said cell having been disposed due to overflow lower priority order.

9 A priority control method of virtual circuit that controls priority order of a plurality of virtual circuits that are multiplied in a buffer, comprising steps of:

detecting a cell having been disposed due to overflow of said buffer from among cells being received via said virtual circuits; and

giving a virtual circuit corresponding to said detected cell lower priority order.

10 The priority control method of virtual circuit of claim 9, wherein said step of giving a virtual circuit lower priority order comprises a step of disposing said received cell without inputting it into said buffer when said received cell is a cell corresponding to a virtual circuit to be given lower priority order.

11 A priority order control device of virtual circuit that controls priority order of a plurality of virtual circuits, comprising:

a buffer for receiving cells via said plurality of virtual circuits;

means for monitoring the state of utilization of said buffer;

control means for selecting an arbitrary virtual circuit from among said plurality of virtual circuits when said buffer is in congestion, and giving said selected virtual circuit lower priority order; and

disposal means for disposing a cell having been received when said buffer is in congestion and said cell corresponds to said selected virtual circuit.

12 The priority order control device of virtual circuit of claim 11, wherein said control means further comprises means for returning the priority order of said virtual circuit given lower priority order to its original priority order when the state of congestion of said buffer is eliminated.

13 The priority order control device of virtual circuit of claim 11, wherein said control means further comprises means for returning the priority order of an arbitrary virtual circuit among virtual circuits given lower priority order after a lapse of a predetermined time, irrespective of the state of utilization of said buffer.

14 The priority order control device of virtual circuit of claim 11, wherein said control means further comprises means for selecting an arbitrary cell from among cells arrived when said buffer is in congestion, and giving a virtual circuit corresponding to said selected cell lower priority order.

15 The priority order control device of virtual circuit of claim 14, wherein said means for selecting an arbitrary cell comprises means for selecting a predetermined number of cells in order of circuit number of corresponding to a virtual circuit from small to large from among cells having been received via said virtual circuits when said buffer is in congestion.

16 The priority order control device of virtual circuit of claim 14, wherein said means for selecting an arbitrary cell comprises means for selecting a predetermined number of cells in order of circuit number of corresponding virtual circuit from large to small from among cells having been received via said virtual circuits when said buffer is in congestion.

17 The priority order control device of virtual circuit of claim 14, wherein said means for selecting an arbitrary cell comprises means for selecting a cell corresponding to a virtual circuit of which priority order is low from among cells having been received via said virtual circuits when said buffer is in congestion, wherein the priority order of said virtual circuits is determined in advance.

18 The priority order control device of virtual circuit of claim 11, further comprising means for detecting a cell having been disposed due to overflow of said buffer, wherein said control means further comprises means for giving a virtual circuit corresponding to the detected cell lower priority order.

19 A priority order control device that controls priority order of a plurality of virtual circuits, comprising:

a buffer for receiving cells via said plurality of virtual circuits;

first detection means for detecting the state of congestion and elimination of the state of congestion of said buffer and outputting a detection signal;

second detection means for detecting a cell having been disposed due to overflow of said buffer and outputting cell information of said detected cell;

control means having:

means for storing circuit numbers of said plurality of virtual circuits and having admission areas corresponding to said circuit numbers;

means for selecting an arbitrary cell from among cells arrived when said buffer is in congestion;

means for writing information, "to be given lower priority order", in an admission area of a circuit number of a virtual circuit corresponding to the selected cell, and writing information, "to be given lower priority order", in an admission area of a circuit number of a virtual circuit corresponding to a cell being disposed based on said cell information, when said detection signal indicates the state of congestion;

means for deleting said information, "to be lower priority order", in an admission area when said detection signal indicates elimination of the state of congestion; and

disposal means for comparing a circuit number of a virtual circuit of a cell arrived when said buffer is in congestion and an admission area of said control means, and disposing the arrived cell of which circuit number is of lower priority order.

20 The priority order control device of virtual circuit of claim 19, wherein said control means comprises means for selecting a predetermined number of cells in order of circuit number of corresponding virtual circuit from small to large from among cells having been received via said virtual circuits when said buffer is in congestion.

21 The priority order control device of virtual circuit of claim 19, wherein said control means comprises

es means for selecting a predetermined number of cells in order of circuit number of corresponding virtual circuit from large to small from among cells having been received via said virtual circuits when said buffer is in congestion.

5

22 The priority order control device of virtual circuit of claim 19, wherein said control means comprises means for selecting a cell corresponding to a cell of which priority order is low from among cells having been received via said virtual circuits when said buffer is in congestion, wherein the priority order of said virtual circuits is determined in advance.

10

23 The priority order control device of virtual circuit of claim 19, wherein said control means further comprises means for writing information, "to be given lower priority order", in an admission area, and deleting the written information, "to be given lower priority order", in the admission area after a lapse of a predetermined time.

15

20

25

30

35

40

45

50

55

Fig.1

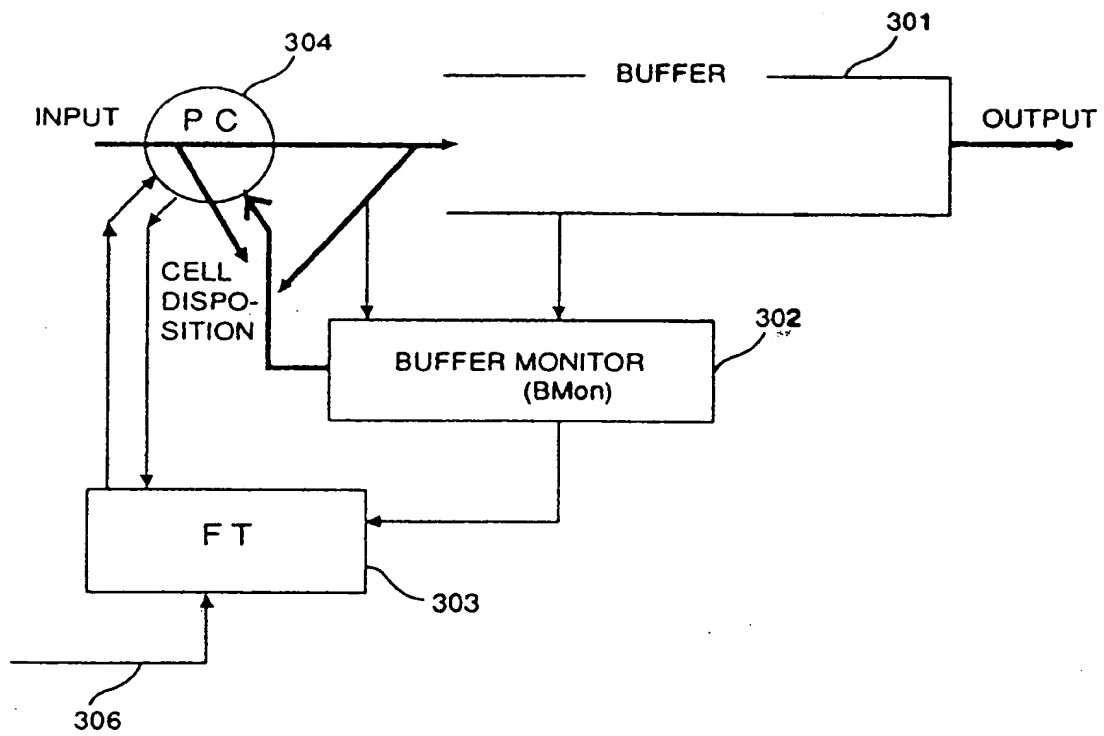


Fig.2

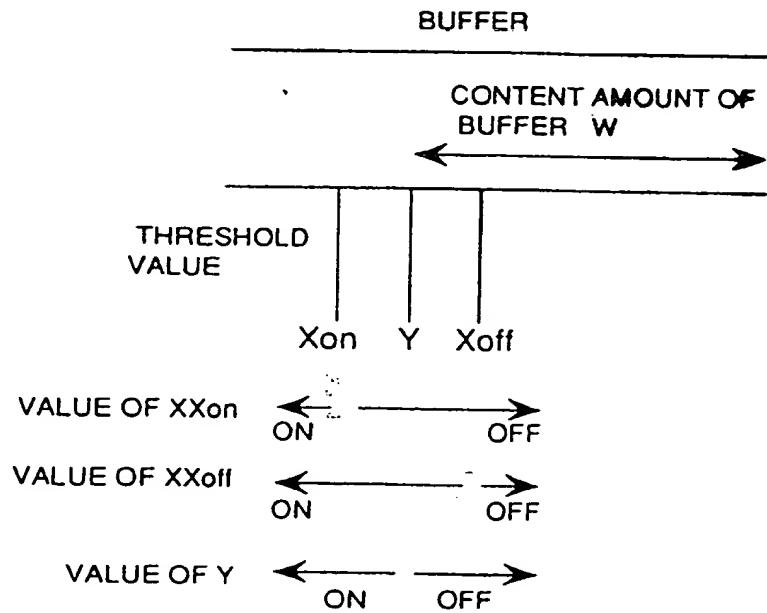


Fig.3

FORWARDING TABLE

INPUT VCI	ADMISSION
1	OK
2	none
3	OK

FIG.4

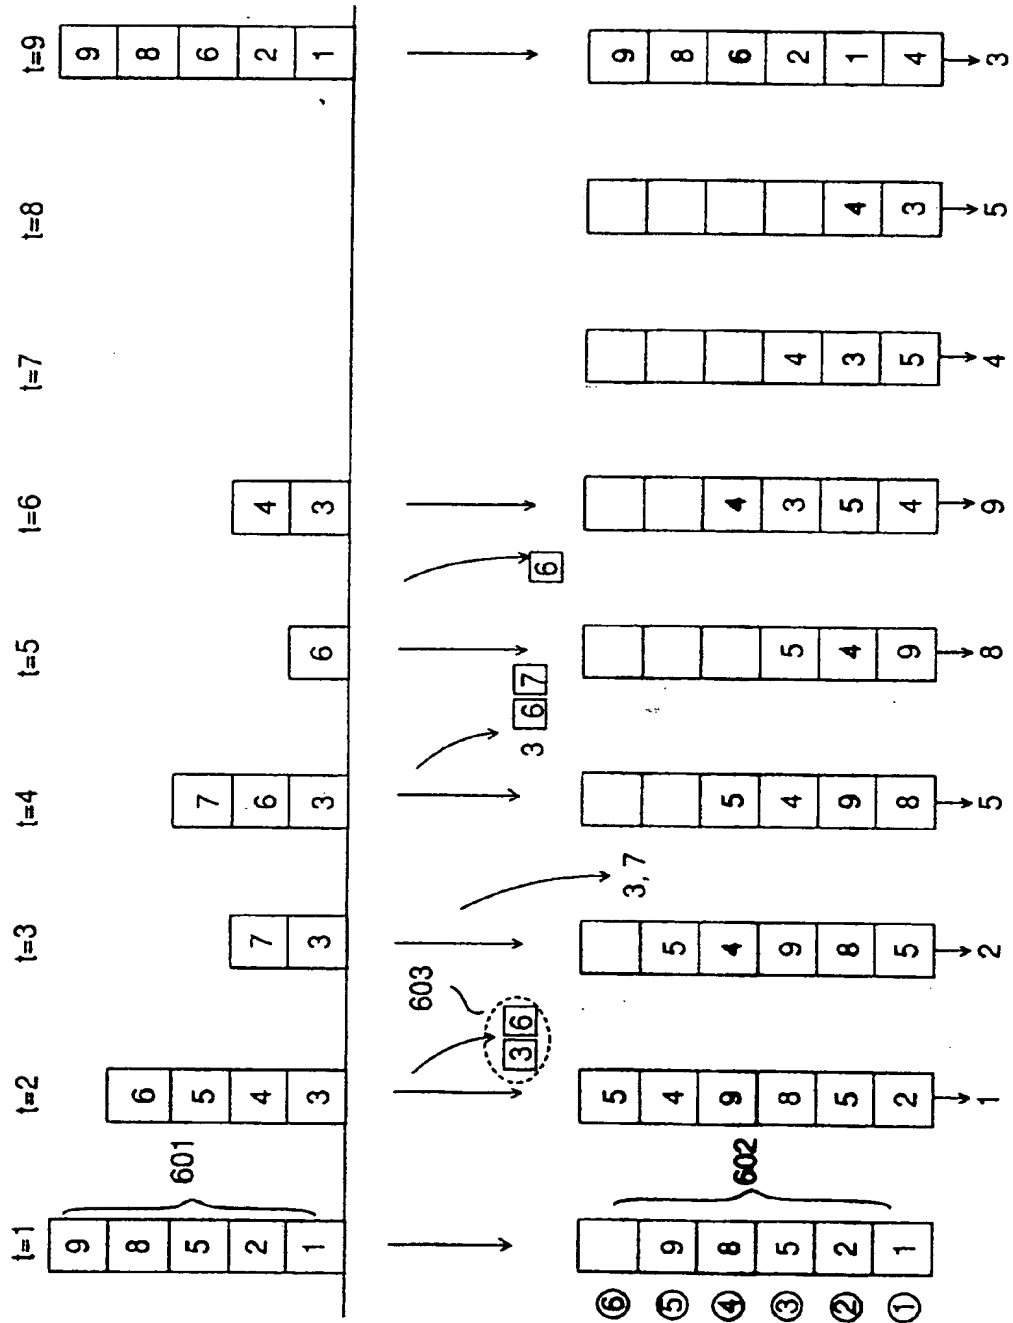


FIG.5

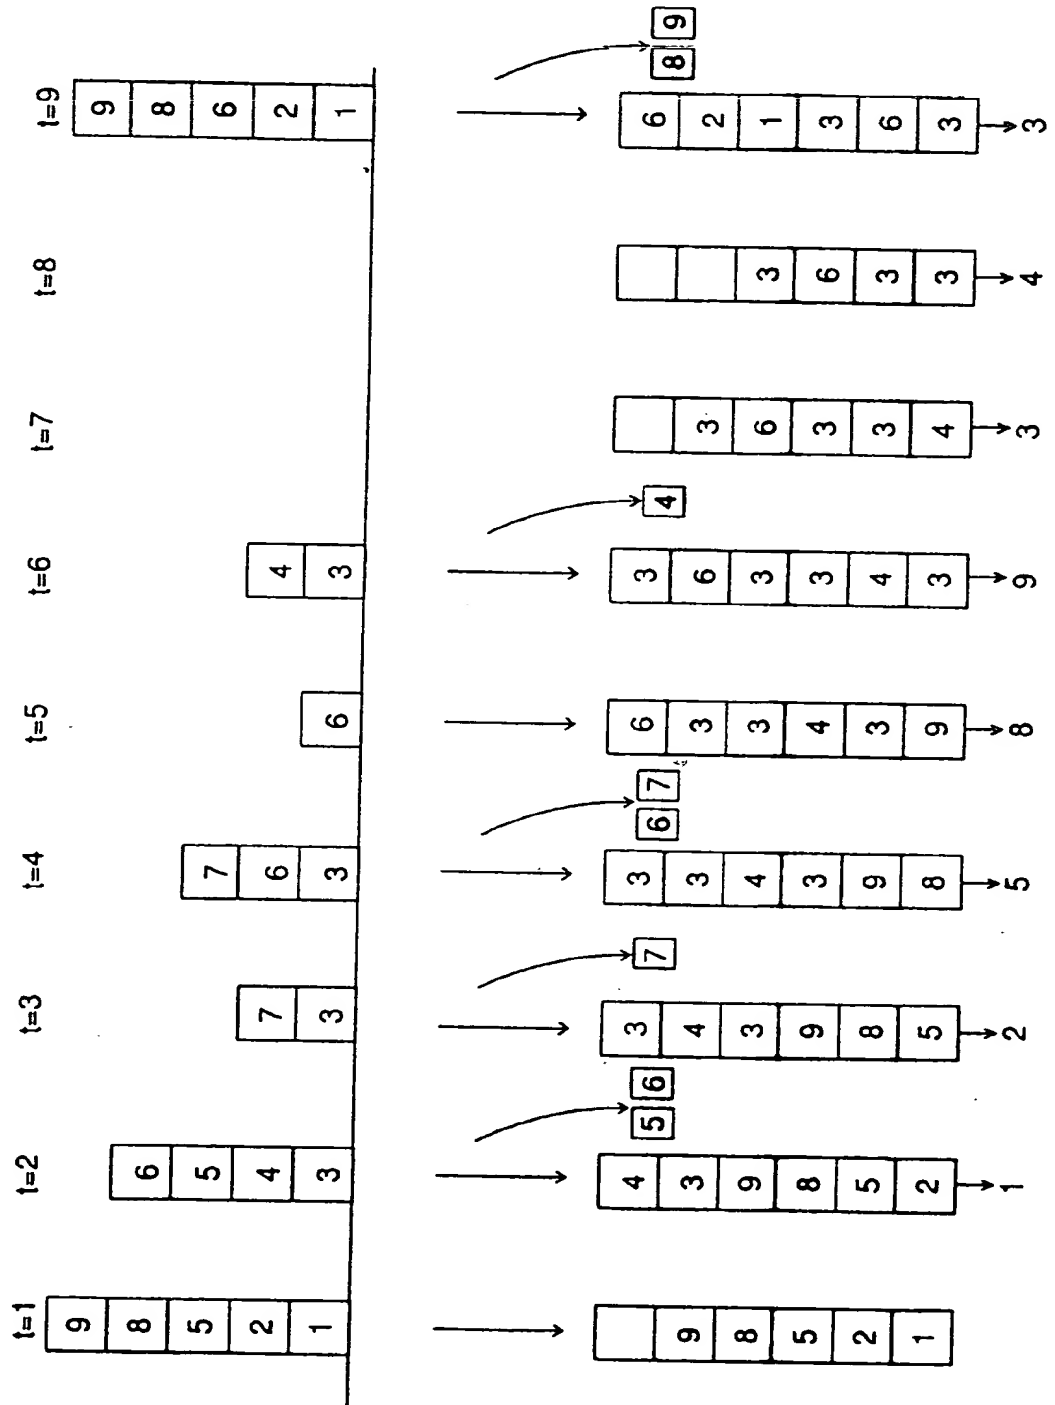


Fig.6


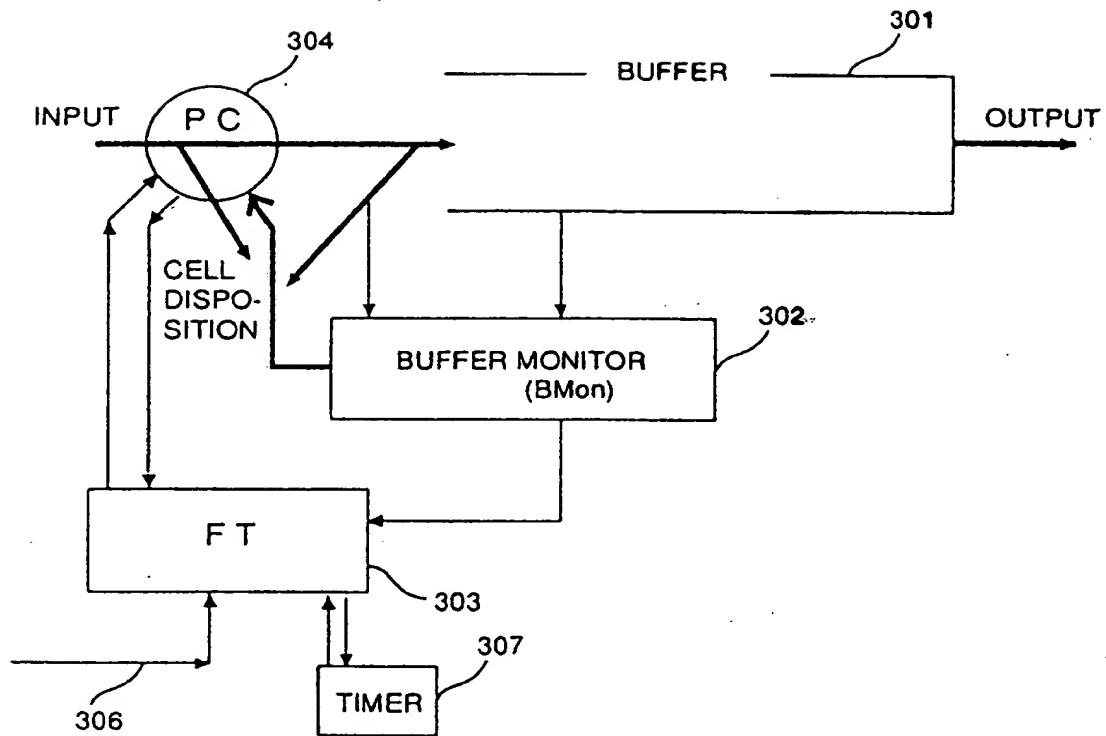


Fig.7



This Page Blank (uspto)

(19)

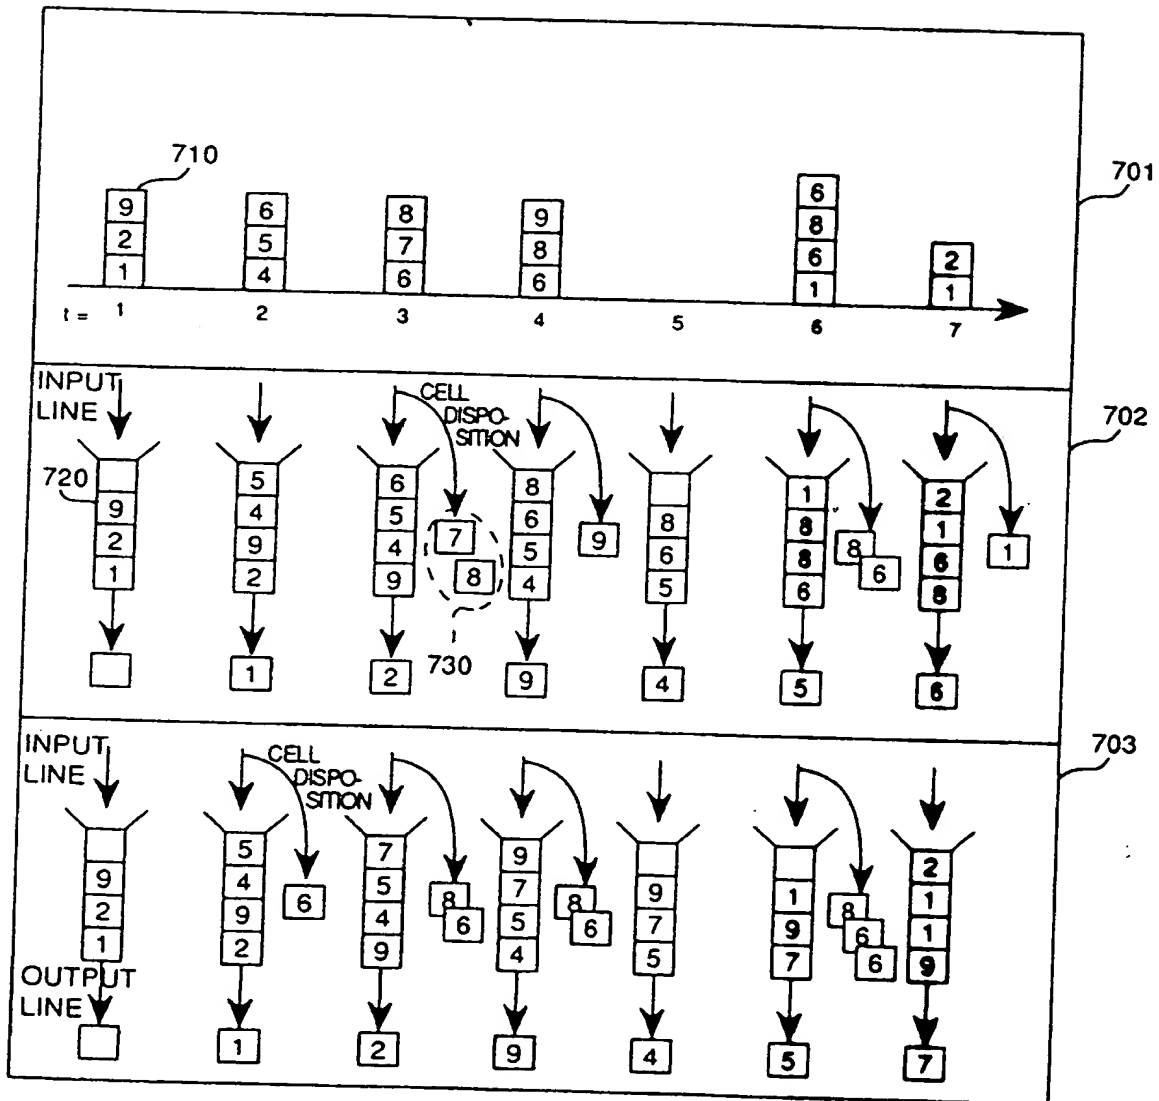

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 689 318 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
09.04.1997 Bulletin 1997/15

(51) Int Cl.⁶: H04L 12/56

(43) Date of publication A2:
27.12.1995 Bulletin 1995/52

(21) Application number: 95304356.9

(22) Date of filing: 21.06.1995

(84) Designated Contracting States:
DE FR GB SE

(30) Priority: 21.06.1994 JP 138830/94

(71) Applicant: NEC CORPORATION
Tokyo (JP)

(72) Inventor: Murase, Tutomu, c/o NEC Corporation
Tokyo (JP)


(74) Representative: Cozens, Paul Dennis et al
Mathys & Squire
100 Grays Inn Road
London WC1X 8AL (GB)

(54) Priority control method of virtual circuit and a device thereof

(57) The present invention monitors the state of utilization of a buffer and a cell that has been disposed.

Based on this monitoring information, it selects a virtual circuit to be given lower priority order to input it into the buffer in lower priority order.

Fig.2

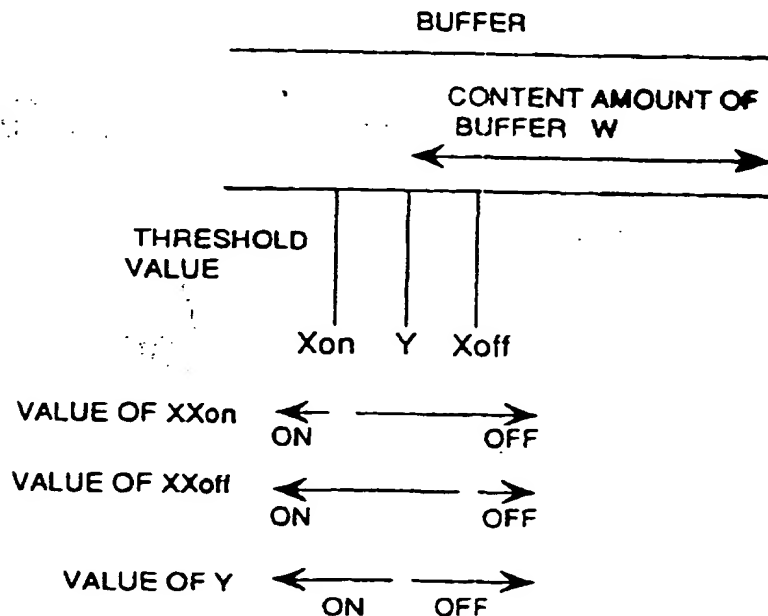

EP 0 689 318 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 95 30 4356

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	EP-A-0 596 200 (ROKE MANOR RESEARCH) 11 May 1994 * the whole document *	1-23	H04L12/56
A	NETWORKING IN THE NINETIES, BAL HARBOUR, APR. 7 - 11, 1991, vol. 2, 7 April 1991, INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, pages 741-753, XP000223400 PEHA J M ET AL: "A COST-BASED SCHEDULING ALGORITHM TO SUPPORT INTEGRATED SERVICES" * page 742, right-hand column, line 17 - line 36 *	1,11,19	
A	PROCEEDINGS OF THE GLOBAL TELECOMMUNICATIONS CONFERENCE (GLOBECOM), HOUSTON, NOV. 29 - DEC. 2, 1993, vol. 3 OF 4, 29 November 1993, INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, pages 1389-1394, XP000436046 HERNANDEZ-VALENCIA E J ET AL: "SIMULATION OF A SIMPLE LOSS/DELAY PRIORITY SCHEME FOR SHARED MEMORY ATM FABRICS" * paragraph 2.1 *	1,11,19	TECHNICAL FIELDS SEARCHED (Int.Cl.6) H04L
A	EP-A-0 406 759 (FUJITSU LTD) 9 January 1991 * column 8, line 22 - line 33 *	1,11,19	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 14 February 1997	Examiner Perez Perez, J
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (01.92) (P/95C01)